



TECHNICAL SHEET
LEADER PF 2 PLUS

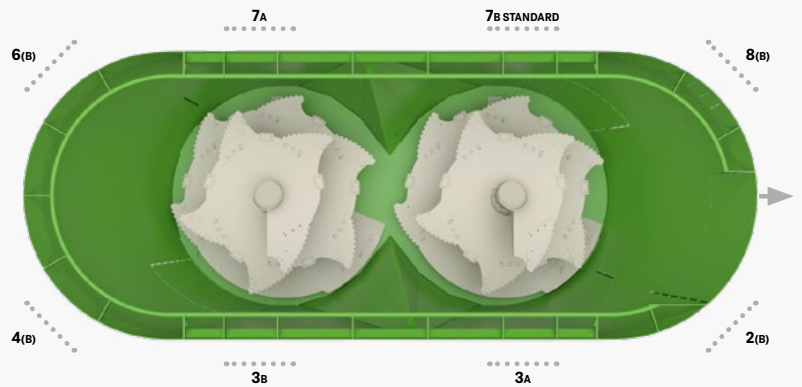

It brings to the attention of all potential customers, all recipients, and to the maximum extent possible, external interlocutors, that Faresin Industries S.p.A. adopts a general Disclaimer regarding the description of the technical and functional characteristics of its machineries, as well as the manner of their use, also with regard to their safety. The Disclaimer must be understood as having a general scope, and therefore Faresin Industries s.p.a. invites to know it, also by accessing the website: www.faresindustries.com

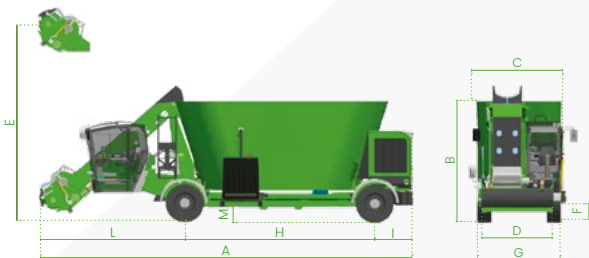

FARESIN.COM



ENGINE TIER 4F		2.18	2.20	2.22	2.22B	2.24	2.26	2.26B	2.28	2.30	2.33
Builder		FPT N45	FPT N67	FPT N67	FPT N67	FPT N67	FPT N67	FPT N67	FPT N67	FPT N67	FPT N67
Power	kW/hp	125/170	151/205	151/205	151/205	151/205	151/205	151/205	191/260	191/260	191/260
Aftertreatment system		DOC + SCR	DOC + SCROF	DOC + SCROF	DOC + SCROF	DOC + SCROF	DOC + SCROF	DOC + SCROF	DOC + SCROF	DOC + SCROF	DOC + SCROF
Capacity	ft ³	635.7	706.3	777	777	847.6	918.2	918.2	988.8	1,059.4	1,165.4

DIMENSIONS ECOMIX		2.18	2.20	2.22	2.22B	2.24	2.26	2.26B	2.28	2.30	2.33
[A] total length	ft	31.6	31.3	33	31.6	32.8	33.7	33	33.8	33.8	33.6
[B] height	ft	8.8	9.4	9.9	9.4	10.4	11.2	10.8	11	11.5	12.2
[C] width	ft	8.2	8.1	8.1	8	8.1	8.1	8	8.3	9.1	9.1
[D] milling cutter width	ft	6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.6
[E] milling height	ft	16.1	16.1	17.4	16.1	17.4	18.3	17.7	18.3	18.3	21.5
[F] unloading height	ft	2.4	2.4	2.4	2.4	2.4	2.5	2.5	2.5	2.5	2.5
[G] outside wheels	ft	7.8	7.8	7.8	7.8	7.8	7.9	7.9	7.9	7.9	7.9
[H] axle clearance	ft	17.6	17.6	17.6	17.6	17.6	18.2	18.2	18.2	18.2	18.2
[I] rear projection	ft	3.5	3.5	3.5	3.5	3.5	3.5	3.4	3.4	3.4	3.4
[L] front projection	ft	10.3	10	11.7	10	11.4	12.6	11.4	12.6	12.6	11.9
[M] frame height	ft	1.2	1.2	1.2	1.2	1.2	1.4	1.4	1.4	1.4	1.4

WEIGHT

Unladen weight	lbs	31,967	33,069	34,392	35,274	35,274	37,479	37,258	39,683	40,786	41,006
Maximum capacity	lbs	13,889	15,432	16,975	16,975	18,519	20,062	20,062	21,605	23,148	25,463

TYRES

Standard		435/50 R19.5	435/50 R19.5	435/50 R19.5	435/50 R19.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5
----------	--	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------

DIMENSIONS ECOMODE		2.18	2.20	2.22	2.22B	2.24	2.26	2.26B	2.28	2.30	2.33
[A] total length	ft	31.6	31.3	33	31.6	32.8	33.7	33	33.8	33.8	33.6
[B] height	ft	8.8	9.4	9.9	9.4	10.4	11.2	10.8	11	11.5	12.2
[C] width	ft	8.2	8.1	8.1	8	8.1	8.1	8	8.3	9.1	9.1
[D] milling cutter width	ft	6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.6	6.6
[E] milling height	ft	16.1	16.1	17.4	16.1	17.4	18.3	17.7	18.3	18.3	21.5
[F] unloading height	ft	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
[G] outside wheels	ft	7.9	7.9	7.9	7.9	7.9	7.9	7.9	7.9	7.9	7.9
[H] axle clearance	ft	17.6	17.6	17.6	17.6	17.6	17.6	18.2	18.2	18.2	18.2
[I] rear projection	ft	3.5	3.5	3.5	3.5	3.5	3.5	3.4	3.4	3.4	3.4
[L] front projection	ft	10.3	10	11.7	10	11.4	12.6	11.4	12.6	12.6	11.9
[M] frame height	ft	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4

WEIGHT

Unladen weight	lbs	33,290	34,171	35,494	35,935	36,376	37,478	38,360	39,683	40,785	41,006
Maximum capacity	lbs	13,889	15,432	16,975	16,975	18,518	20,062	20,062	21,605	23,148	25,463

TYRES

Standard		385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5
----------	--	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------

CONFIGURATION		ECOMIX	ECOMODE
Number of knives		From 7 to 11	From 7 to 11
Adjustable seat with air suspension		●	●
Joystick		Multi-function electro-proportional	Multi-function electro-proportional
Cabin		PF Cab	PF Cab
Ventilation system		Three speeds and temperature setting	Three speeds and temperature setting
6 Work led lights		●	●
Fuel tank	gal	60.7	60.7
Electronic weighing system with four sensors between mixing tub and frame		●	●
Maximum speed	mph	15.5 - 18.6	15.5 - 24.8
Front axle		Drive, steering and with suspension	Drive, steering and with suspension
Rear axle		Drive, steering	Drive, steering and with suspension
Abs system		-	Automatic
Asr system		-	Selectable
Number of augers		2	2
Speed range of the auger	rpm	5, 10, 15, 20, 25, 30, 40, 50	5, 10, 15, 20, 25, 30, 40, 50
External diameter of milling cutter roller	in	23.6	27.6
Hydraulic counter-knives		2	2
Shredder on milling cutter		○	○
Certifiable and/or automatic greasing system		○	○