

LEADER PF 2 PLUS

TECHNICAL SHEET






LEADER PF 2 PLUS

TECHNICAL FEATURES

Models		2.18	2.20	2.22	2.22B	2.24	2.26	2.26B	2.28	2.30	2.33
Dimensions											
[A] Total length	mm	9.640	9.550	10.030	9.650	10.000	10.300	10.060	10.320	10.320	10.250
[B] Height (Ecomix)	mm	2.700	2.870	3.030	2.870	3.260	3.430	3.310	3.390	3.500	3.720
[B] Height (Ecomode)	mm	2.770	2.940	3.100	2.940	3.260	3.430	3.310	3.390	3.500	3.720
[C] Width	mm	2.490	2.480	2.470	2.450	2.470	2.470	2.450	2.550	2.800	2.800
[D] Milling cutter width	mm	2.040	2.040	2.040	2.040	2.040	2.040	2.040	2.040	2.040	2.040
[E] Milling height (Ecomix)	mm	4.935	4.920	5.310	4.920	5.310	5.600	5.400	5.600	5.600	6.560
[E] Milling height (Ecomode)	mm	5.005	4.990	5.380	5.380	5.380	5.600	5.470	5.600	5.600	6.560
[F] Unloading height (Ecomix)	mm	730	730	730	730	730	770	770	770	770	770
[F] Unloading height (Ecomode)	mm	770	770	770	770	770	770	770	770	770	770
[G] Outside wheels (Ecomix)	mm	2.385	2.385	2.385	2.385	2.385	2.400	2.400	2.400	2.400	2.400
[G] Outside wheels (Ecomode - Ecotronic)	mm	2.400	2.400	2.400	2.400	2.400	2.400	2.400	2.400	2.400	2.400
[H] Axle clearance	mm	5.370	5.370	5.370	5.370	5.370	5.370	5.570	5.570	5.570	5.570
[I] Rear projection	mm	1.080	1.080	1.080	1.080	1.080	1.080	1.050	1.050	1.050	1.050
[L] Front projection	mm	3.140	3.070	3.580	3.050	3.050	3.850	3.475	3.850	3.850	3.630
[M] Frame height (Ecomix)	mm	370	370	370	370	370	440	440	440	440	440
[M] Frame height (Ecomode-Ecotronic)	mm	440	440	440	440	440	440	440	440	440	440
Engine											
Deutz TCD 2012 L06 2V 155/210	STAGE IIIA	-	●	●	●	●	●	●	-	-	-
FPT N45 125/170	STAGE V	●	-	-	-	-	-	-	-	-	-
FPT N67 MNT 129/175	STAGE IIIA	●	-	-	-	-	-	-	-	-	-
FPT N67 151/205	STAGE V	-	●	●	●	●	●	●	-	-	-
FPT N67 ENTX20.00 175/238	STAGE IIIA	-	-	-	-	-	-	-	●	●	●
FPT N67 191/260	STAGE V	-	-	-	-	-	-	-	●	●	●
Tank capacity											
Fuel tank	l	230	230	230	230	230	230	230	230	230	230
Adblue tank	l	60	60	60	60	60	60	60	60	60	60
Hydraulic oil tank	l	80	80	80	80	80	80	80	80	80	80
Weights											
Capacity	m ³	18	20	22	22	24	26	26	28	30	33
Unladen weight	kg	15.100	15.500	16.100	16.300	16.500	17.000	17.400	18.000	18.500	18.600
Maximum capacity	kg	6.300	7.000	7.700	7.700	8.400	9.100	9.100	9.800	10.500	11.550
Tyres											
Standard Ecomix		435/50 R19.5					385/65 R22.5				
Standard Ecomode							385/65 R22.5				

● Standard ○ Optional - Not available

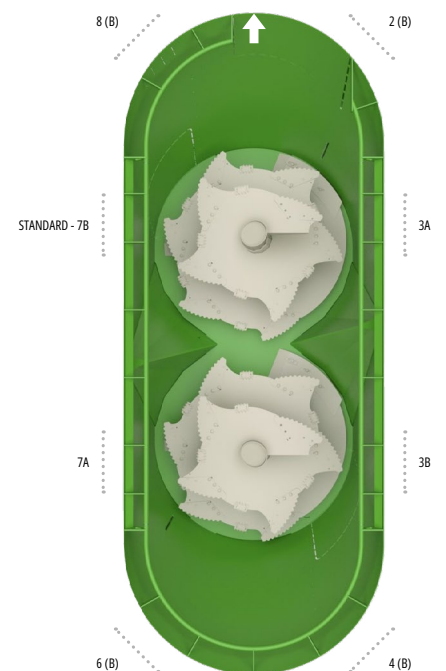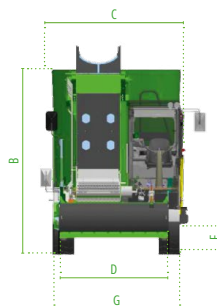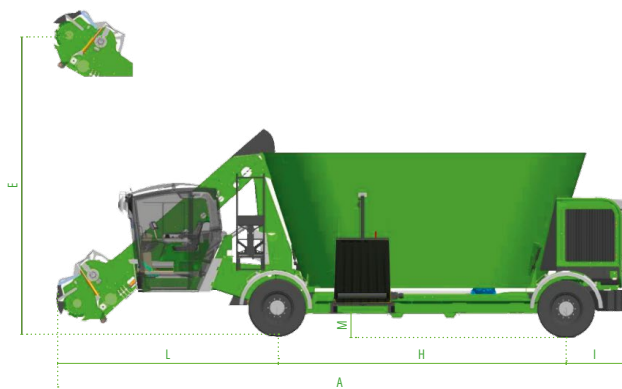

Configurations		Ecomix	Ecomode
Hydraulics			
Service distributor		Elettro-proportional	Elettro-proportional
Hydraulic service capacity	l/bar	92/180	92/180
Multi-function electro-proportional joystick		●	●
Cabin			
Cabin		PF Cab	PF Cab
Seat		Grammer pneumatic	Grammer pneumatic
Colour display	"	7	7
Operating armrest		●	●
Steering column adjustment	n.	3	3
Three speeds ventilation system and temperature controller		●	●
Air conditioning		○	○
Lights			
LED worklights		6	6
Street lighting		●	●
Side end-outline marker lights		○	○
Mixing			
Capacity	m ³	18 - 33	18 - 33
Number of augers	n.	1 - 2	1 - 2
Speed range of the auger	rpm	5, 10, 15, 20, 25, 30, 40, 50	5, 10, 15, 20, 25, 30, 40, 50
Power Blade		●	●
Unloading Blade		●	●
Knives with two positions		●	●
Auger with Easyclean solution		●	●
Mixing tank wall thickness	mm	8	8
Mixing tank floor thickness	mm	25	25
Counter-knives	n.	2 hydraulic	2 hydraulic
Loading Halt		○	○
Cutter			
External diameter of milling cutter roller	mm	600	700
Shredder on milling cutter		○	○
Manual hopper on milling cutter		○	○
Milling cutter lifting cylinder	n.	2	2
Axles			
Traction		4 WD	4 WD
Suspensions		Front hydropneumatic	Front and rear hydropneumatic
Discharges			
Standard position	n.	7B	7B
Rubber unloading belt		○	○
Chassis			
Rear bumper		Larger and extractable	Larger and extractable
Fuel cap		Quick-locking cap with key	Quick-locking cap with key
Front suspension height indicator		Front	Front and rear
Hydraulic system			
Service distributor		Electroproportional, on-off	Electroproportional, on-off
Transmission			
Engine water preheating		○	○
Post-treatment system (only Stage V)		DOC + SCR / DOC + SCROF	DOC + SCR / DOC + SCROF
Speed	km/h	25 - 30	25 - 40
Automatic ABS system		-	●
Selectable ASR system		-	●
Steering mode		Front, all-wheel and crab-steering	Front, all-wheel and crab-steering
Other			
TELEMATICS Farmatics		○	○
Tub cover with left side opening hatch		○	○
NIR		○	○
360° Camera system		○	○

THE NEW STANDARD FOR MIXER WAGONS



**FARESIN INDUSTRIES SPA
HEADQUARTERS**

Via dell'Artigianato, 36
36042 Breganze (Vicenza), Italy
Tel. + 39 0445 800300
faresin@faresin.com

FARESIN DEUTSCHLAND GMBH

Steinach B.R. - an der
Frankenhoehe 1
91605 Gallmersgarten, Germany
Tel. +49 9843 9802828
lager@faresin.de

**FARESIN DEUTSCHLAND
NORD GMBH**

+49 1525 9697091
info@faresin-nord.dee

FARESIN POLAND SP. Z O.O.

ul. Borowiacka 9
87-100 Torun, Polska
Tel. +48 503 147 811
poland@faresin.com

**FARESIN INDUSTRIES
FRANCE**

2 Rue de l'Avenir 14460
Colombelles, France
Tel + 33 2 31 82 79 61
france@faresin.com

It brings to the attention of all potential customers, all recipients, and to the maximum extent possible, external interlocutors, that Faresin Industries S.p.A. adopts a general Disclaimer regarding the description of the technical and functional characteristics of its machineries, as well as the manner of their use, also with regard to their safety. The Disclaimer must be understood as having a general scope, and therefore Faresin Industries s.p.a. invites to know it, also by accessing the website: faresin.com

FARESIN.COM



11.2025