



TECHNICAL SHEET
LEADER PF 2 PLUS

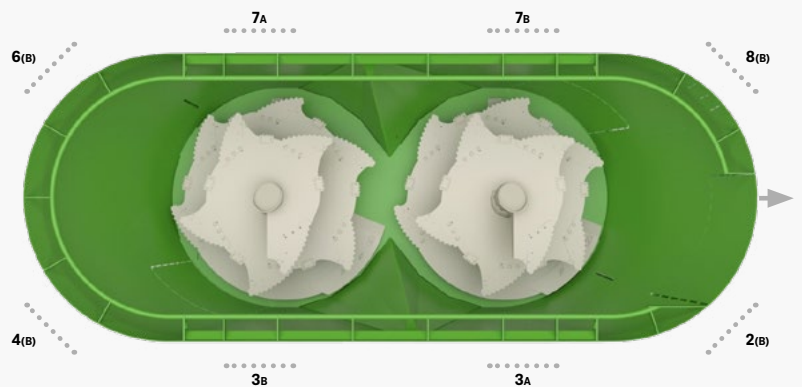

It brings to the attention of all potential customers, all recipients, and to the maximum extent possible, external interlocutors, that Faresin Industries S.p.A. adopts a general Disclaimer regarding the description of the technical and functional characteristics of its machineries, as well as the manner of their use, also with regard to their safety. The Disclaimer must be understood as having a general scope, and therefore Faresin Industries s.p.a. invites to know it, also by accessing the website: www.faresindustries.com

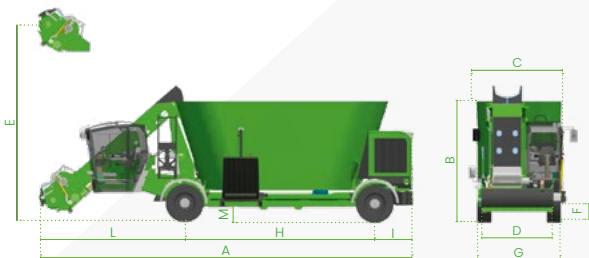

FARESIN.COM



DIMENSIONS ECOMIX		2.18	2.20	2.22	2.22B	2.24	2.26	2.26B	2.28	2.30	2.33
[A] total length	mm	9640	9550	10030	9650	10000	10300	10060	10320	10320	10250
[B] height	mm	2700	2870	3030	2870	3190	3430	3310	3390	3500	3720
[C] width	mm	2490	2480	2470	2450	2470	2470	2450	2550	2800	2800
[D] milling cutter width	mm	2040	2040	2040	2040	2040	2040	2040	2040	2040	2040
[E] milling height	mm	4935	4920	5310	4920	5310	5600	5400	5600	5600	6560
[F] unloading height	mm	730	730	730	730	730	770	770	770	770	770
[G] outside wheels	mm	2385	2385	2385	2385	2385	2400	2400	2400	2400	2400
[H] axle clearance	mm	5370	5370	5370	5370	5370	5370	5570	5570	5570	5570
[I] rear projection	mm	1080	1080	1080	1080	1080	1080	1050	1050	1050	1050
[L] front projection	mm	3140	3070	3580	3050	3500	3850	3475	3850	3850	3630
[M] frame height	mm	370	370	370	370	370	440	440	440	440	440

ENGINE STAGE IIIA

Builder		FPT N67 MNT	Deutz TCD 2012 L06 2V	Deutz TCD 2012 L06 2V	Deutz TCD 2012 L06 2V	Deutz TCD 2012 L06 2V	Deutz TCD 2012 L06 2V	Deutz TCD 2012 L06 2V	FTP N67 ENTX20.00	FTP N67 ENTX20.00	FTP N67 ENTX20.00
Power	kw/hp	129/175	155/210	155/210	155/210	155/210	155/210	155/210	175/238	175/238	175/238
Capacity	m ³	18	20	22	22	24	26	26	28	30	33

WEIGHT

Unladen weight	kg	14500	15000	15600	16000	16000	17000	16900	18000	18500	18600
Maximum capacity	kg	6300	7000	7700	7700	8400	9100	9100	9800	10500	11550

TYRES

Standard		435/50 R19.5	435/50 R19.5	435/50 R19.5	435/50 R19.5	435/50 R19.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5
----------	--	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------

DIMENSIONS ECOMODE		2.18	2.20	2.22	2.22B	2.24	2.26	2.26B	2.28	2.30	2.33
[A] total length	mm	9640	9550	10030	9650	10000	10300	10060	10320	10320	10250
[B] height	mm	2770	2940	3100	2940	3260	3430	3310	3390	3500	3720
[C] width	mm	2490	2480	2470	2450	2470	2470	2450	2550	2800	2800
[D] milling cutter width	mm	2040	2040	2040	2040	2040	2040	2040	2040	2040	2040
[E] milling height	mm	5005	4990	5380	5380	5380	5600	5470	5600	5600	6560
[F] unloading height	mm	770	770	770	770	770	770	770	770	770	770
[G] outside wheels	mm	2400	2400	2400	2400	2400	2400	2400	2400	2400	2400
[H] axle clearance	mm	5370	5370	5370	5370	5370	5370	5570	5570	5570	5570
[I] rear projection	mm	1080	1080	1080	1080	1080	1080	1050	1050	1050	1050
[L] front projection	mm	3140	3070	3580	3050	3500	3850	3475	3850	3850	3630
[M] frame height	mm	440	440	440	440	440	440	440	440	440	440

ENGINE STAGE IIIA

Builder		Deutz TCD 2012 L06 2V	Deutz TCD 2012 L06 2V	Deutz TCD 2012 L06 2V	Deutz TCD 2012 L06 2V	Deutz TCD 2012 L06 2V	Deutz TCD 2012 L06 2V	Deutz TCD 2012 L06 2V	FTP N67 ENTX20.00	FTP N67 ENTX20.00	FTP N67 ENTX20.00
Power	kw/hp	155/210	155/210	155/210	155/210	155/210	155/210	155/210	175/238	175/238	175/238
Capacity	m ³	18	20	22	22	24	26	26	28	30	33

WEIGHT

Unladen weight	kg	15100	15500	16100	16300	16500	17000	17400	18000	18500	18600
Maximum capacity	kg	6300	7000	7700	7700	8400	9100	9100	9800	10500	11550

TYRES

Standard		385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5
----------	--	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------

CONFIGURATION	ECOMIX	ECOMODE
Number of knives	From 7 to 11	From 7 to 11
Adjustable seat with air suspension	●	●
Joystick	Multi-function electro-proportional	Multi-function electro-proportional
Cabin	PF Cab	PF Cab
Ventilation system	Three speeds and temperature setting	Three speeds and temperature setting
6 Work led lights	●	●
Fuel tank	l	230
Electronic weighing system with four sensors between mixing tub and frame	●	●
Maximum speed	km/h	25 - 30
Front axle	Drive, steering and with suspension	Drive, steering and with suspension
Rear axle	Drive, steering	Drive, steering and with suspension
Abs system	-	Automatic
Asr system	-	Selectable
Number of augers	2	2
Speed range of the auger	rpm	5, 10, 15, 20, 25, 30, 40, 50
External diameter of milling cutter roller	mm	600
Hydraulic counter-knives	2	2
Shredder on milling cutter	○	○
Certifiable and/or automatic greasing system	○	○