

# ***LEADER PF 2 PLUS COMPACT***

TECHNICAL SHEET





# LEADER PF 2 PLUS COMPACT

## TECHNICAL FEATURES

Models		2.12C	2.14C	2.16C
<b>Dimensions</b>				
[A] Total length	mm	8750	8680	9180
[B] Height (Ecomix)	mm	2530	2770	2965
[B] Height (Ecomode - Ecotronic)	mm	2515	2755	2965
[C] Width	mm	2300	2300	2300
[D] Milling cutter width	mm	2040	2040	2040
[E] Milling height (Ecomix)	mm	5005	4870	5600
[E] Milling height (Ecomode - Ecotronic)	mm	5065	4930	5640
[F] Unloading height (Ecomix)	mm	650	650	670
[F] Unloading height (Ecomode - Ecotronic)	mm	670	670	710
[G] Outside wheels (Ecomix)	mm	2165	2165	2235
[G] Outside wheels (Ecomode - Ecotronic)	mm	2235	2235	2235
[H] Axle clearance	mm	4730	4730	4730
[I] Rear projection	mm	960	960	960
[L] Front projection	mm	3060	2990	3490
[M] Frame height (Ecomix)	mm	400	400	420
[M] Frame height (Ecomode - Ecotronic)	mm	420	420	460
<b>Engine</b>				
FPT N45 125/170	STAGE V	●	●	●
<b>Tank capacity</b>				
Fuel tank	l	230	230	230
Adblue tank	l	60	60	60
Hydraulic oil tank	l	80	80	80
<b>Weights</b>				
Capacity	m <sup>3</sup>	12	14	16
Unladen weight	kg	12600	12800	13000
Maximum capacity	kg	4200	4900	5600
<b>Tyres</b>				
Standard Ecomix		315/60 R22.5	315/60 R22.5	315/60 R22.5
Standard Ecomode - Ecotronic		385/65 R22.5	385/65 R22.5	385/65 R22.5

● Standard    ○ Optional    - Not available

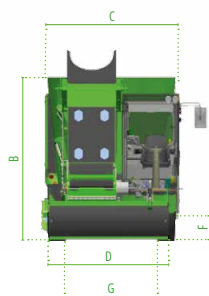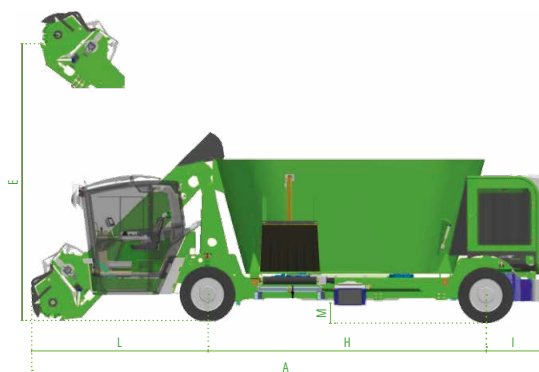

# LEADER PF 2 PLUS COMPACT

## CONFIGURATIONS

Configurations		Ecomix	Ecomode
<b>Hydraulics</b>			
Service distributor		Elettro-proportional	Elettro-proportional
Hydraulic service capacity	l/bar	92/180	92/180
Multi-function electro-proportional joystick		●	●
<b>Cabin</b>			
Cabin		PF Cab	PF Cab
Seat		Grammer pneumatic	Grammer pneumatic
Colour display	"	7	7
Operating armrest		●	●
Steering column adjustment	n.	3	3
Three speeds ventilation system and temperature controller		●	●
Air conditioning		○	○
<b>Lights</b>			
LED worklights		6	6
Street lighting		●	●
Side end-outline marker lights		○	○
<b>Mixing</b>			
Capacity	m <sup>3</sup>	12 - 16	12 - 16
Number of augers	n.	2	2
Speed range of the auger	rpm	5, 10, 15, 20, 25, 30, 40, 50	5, 10, 15, 20, 25, 30, 40, 50
Power Blade		●	●
Unloading Blade		●	●
Knives with two positions		●	●
Auger with Easyclean solution		●	●
Mixing tank wall thickness	mm	8	8
Mixing tank floor thickness	mm	25	25
Counter-knives	n.	2 hydraulic	2 hydraulic
Loading Halt		○	○
<b>Cutter</b>			
External diameter of milling cutter roller	mm	600 / 700	600 / 700
Shredder on milling cutter		○	○
Manual hopper on milling cutter		○	○
Milling cutter lifting cylinder	n.	2	2
<b>Axles</b>			
Traction		4 WD	4 WD
Suspensions		Front hydropneumatic	Front and rear hydropneumatic
<b>Discharges</b>			
Standard position	n.	7B	7B
Rubber unloading belt		○	○
<b>Chassis</b>			
Rear bumper		Larger and extractable	Larger and extractable
Fuel cap		Quick-locking cap with key	Quick-locking cap with key
Front suspension height indicator		Front	Front and rear
<b>Hydraulic system</b>			
Service distributor		Electroproportional, on-off	Electroproportional, on-off
<b>Transmission</b>			
Engine water preheating		○	○
Post-treatment system (only Stage V)		DOC + SCR / DOC + SCROF	DOC + SCR / DOC + SCROF
Speed	km/h	25 - 30	25 - 40
Automatic ABS system		-	●
Selectable ASR system		-	●
Steering mode		Front, all-wheel and crab-steering	Front, all-wheel and crab-steering
<b>Other</b>			
Telematics Farmatics		○	○
Tub cover with left side opening hatch		●	●
NIR		○	○
360° Camera system		○	○

● Standard

○ Optional

- Not available

# THE NEW STANDARD FOR MIXER WAGONS



**FARESIN INDUSTRIES SPA  
HEADQUARTERS**

Via dell'Artigianato, 36  
36042 Breganze (Vicenza), Italy  
Tel. + 39 0445 800300  
faresin@faresin.com

**FARESIN DEUTSCHLAND GMBH**

Steinach B.R. - an der  
Frankenhoehe 1  
91605 Gallmersgarten, Germany  
Tel. +49 9843 9802828  
lager@faresin.de

**FARESIN DEUTSCHLAND  
NORD GMBH**

+49 1525 9697091  
info@faresin-nord.dee

**FARESIN POLAND SP. Z O.O.**

ul. Borowiacka 9  
87-100 Torun, Polska  
Tel. +48 503 147 811  
poland@faresin.com

**FARESIN INDUSTRIES  
FRANCE**

2 Rue de l'Avenir 14460  
Colombelles, France  
Tel + 33 2 31 82 79 61  
france@faresin.com

It brings to the attention of all potential customers, all recipients, and to the maximum extent possible, external interlocutors, that Faresin Industries S.p.A. adopts a general Disclaimer regarding the description of the technical and functional characteristics of its machineries, as well as the manner of their use, also with regard to their safety. The Disclaimer must be understood as having a general scope, and therefore Faresin Industries s.p.a. invites to know it, also by accessing the website: [faresin.com](http://faresin.com)

**FARESIN.COM**



03.2026