



# LEADER PF 2 PLUS COMPACT

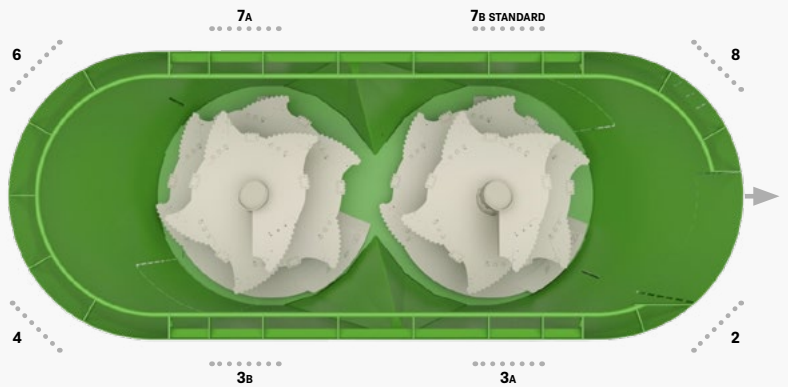

It brings to the attention of all potential customers, all recipients, and to the maximum extent possible, external interlocutors, that Faresin Industries S.p.A. adopts a general Disclaimer regarding the description of the technical and functional characteristics of its machineries, as well as the manner of their use, also with regard to their safety. The Disclaimer must be understood as having a general scope, and therefore Faresin Industries s.p.a. invites to know it, also by accessing the website: [www.faresindustries.com](http://www.faresindustries.com)

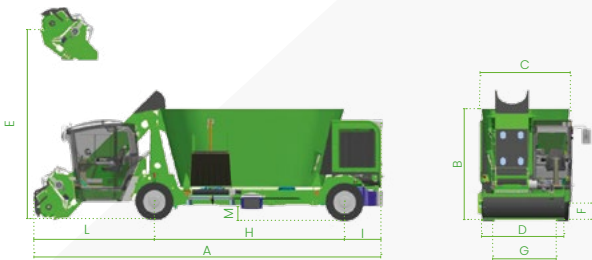

**FARESIN.COM**



ENGINE STAGE IIIA		2.12C	2.14C	2.16C
Builder		Deutz TCD 2012 L04 2V	Deutz TCD 2012 L04 2V	Deutz TCD 2012 L04 2V
Power	kW/hp	103/140	103/140	103/140
Capacity	m³	12	14	16

DIMENSIONS ECOMIX		2.12C	2.14C	2.16C
[A] total length	mm	8750	8680	9180
[B] height	mm	2530	2770	2965
[C] width	mm	2300	2300	2300
[D] milling cutter width	mm	2040	2040	2040
[E] milling height	mm	5005	4870	5600
[F] unloading height	mm	650	650	670
[G] outside wheels	mm	2165	2165	2235
[H] axle clearance	mm	4730	4730	4730
[I] rear projection	mm	960	960	960
[L] front projection	mm	3060	2990	3490
[M] frame height	mm	400	400	420

WEIGHT		2.12C	2.14C	2.16C
Unladen weight	kg	12600	12800	13000
Maximum capacity	kg	4200	4900	5600

TYRES		2.12C	2.14C	2.16C
Standard		315/60 R22.5	315/60 R22.5	385/55 R19.5

DIMENSIONS ECOMODE		2.12C	2.14C	2.16C
[A] total length	mm	8750	8680	9180
[B] height	mm	2550	2790	3000
[C] width	mm	2300	2300	2300
[D] milling cutter width	mm	2040	2040	2040
[E] milling height	mm	5065	4930	5640
[F] unloading height	mm	670	670	710
[G] outside wheels	mm	2235	2235	2235
[H] axle clearance	mm	4730	4730	4730
[I] rear projection	mm	960	960	960
[L] front projection	mm	3060	2990	3490
[M] frame height	mm	420	420	460

WEIGHT		2.12C	2.14C	2.16C
Unladen weight	kg	13000	13200	13400
Maximum capacity	kg	4200	4900	5600

TYRES		2.12C	2.14C	2.16C
Standard		385/55 R22,5	385/55 R22,5	385/55 R22,5

CONFIGURATION		ECOMIX	ECOMODE
Number of knives		From 7 to 11	From 7 to 11
Adjustable seat with air suspension		●	●
Joystick		Multi-function electro-proportional	Multi-function electro-proportional
Cabin		PF Cab	PF Cab
Ventilation system		Three speeds and temperature setting	Three speeds and temperature setting
6 Work led lights		●	●
Fuel tank	l	230	230
Electronic weighing system with four sensors between mixing tub and frame		●	●
Maximum speed	km/h	25 - 30	25 - 40
Front axle		Drive, steering and with suspension	Drive, steering and with suspension
Rear axle		Drive, steering	Drive, steering and with suspension
Abs system		-	Automatic
Asr system		-	Selectable
Number of augers		2	2
Speed range of the auger	rpm	5, 10, 15, 20, 25, 30, 40, 50	5, 10, 15, 20, 25, 30, 40, 50
External diameter of milling cutter roller	mm	600	700
Hydraulic counter-knives		2	2
Shredder on milling cutter		○	○
Certifiable and or automatic greasing system		○	○