



TECHNICAL SHEET
LEADER PF1

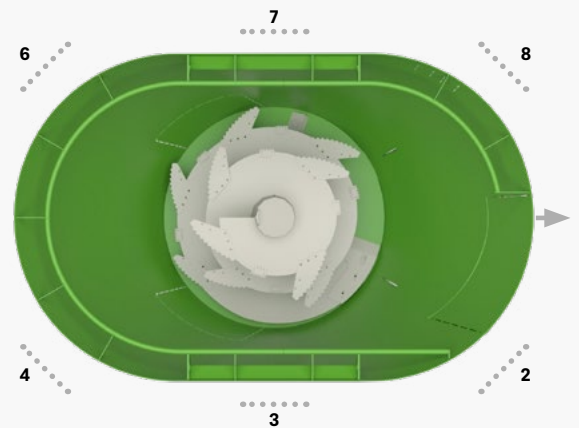

It brings to the attention of all potential customers, all recipients, and to the maximum extent possible, external interlocutors, that Faresin Industries S.p.A. adopts a general Disclaimer regarding the description of the technical and functional characteristics of its machineries, as well as the manner of their use, also with regard to their safety. The Disclaimer must be understood as having a general scope, and therefore Faresin Industries s.p.a. invites to know it, also by accessing the website: www.faresindustries.com



FARESIN.COM



DIMENSIONS ECOMIX		1.11	1.14A	1.14B	1.17A	1.17B	1.20
[A] total length	mm	7650	8090	7650	8090	8000	8440
[B] height	mm	2875	3220	2980	3280	2980	3270
[C] width	mm	2440	2440	2550	2550	2920	2920
[D] milling cutter width	mm	2040	2040	2040	2040	2040	2040
[E] milling height	mm	4950	5350	4940	5350	4940	5350
[F] unloading height	mm	610	600	600	600	600	600
[G] outside wheels	mm	2340	2340	2340	2340	2340	2340
[H] axle clearance	mm	3560	3560	3560	3560	3910	3910
[I] rear projection	mm	1030	1030	1030	1030	1030	1030
[L] front projection	mm	3060	3500	3060	3500	3060	3500
[M] frame height	mm	420	410	410	410	410	410

ENGINE STAGE IIIA

Builder		Deutz TCD 2012 L04 2V	FPT N67 MNT	FPT N67 MNT	FPT N67 MNT	FPT N67 MNT	FPT N67 MNT
Power	kW/hp	103/140	129/175	129/175	129/175	129/175	129/175
Capacity	m³	11	14	14	17	17	20

WEIGHT

Unladen weight	kg	11000	12700	12000	12600	13000	13600
Maximum capacity	kg	3850	4900	4900	5950	5950	7000

TYRES

Standard		315/60 R22.5	435/50 R19.5	435/50 R19.5	435/50 R19.5	435/50 R19.5	435/65 R22.5
----------	--	--------------	--------------	--------------	--------------	--------------	--------------

DIMENSIONS ECOMODE		1.11	1.14A	1.14B	1.17A	1.17B	1.20
[A] total length	mm	7650	8090	7650	8090	8000	8440
[B] height	mm	2935	3290	3050	3350	3050	3340
[C] width	mm	2440	2440	2550	2550	2920	2920
[D] milling cutter width	mm	2040	2040	2040	2040	2040	2040
[E] milling height	mm	5010	5420	5010	5420	5010	5420
[F] unloading height	mm	670	670	670	670	670	670
[G] outside wheels	mm	2340	2340	2340	2340	2340	2340
[H] axle clearance	mm	3560	3560	3560	3560	3910	3910
[I] rear projection	mm	1030	1030	1030	1030	1030	1030
[L] front projection	mm	3060	3500	3060	3500	3060	3500
[M] frame height	mm	480	480	480	480	480	480

ENGINE STAGE IIIA

Builder		Deutz TCD 2012 L04 2V	Deutz TCD 2012 L06 2V	Deutz TCD 2012 L06 2V	Deutz TCD 2012 L06 2V	Deutz TCD 2012 L06 2V	Deutz TCD 2012 L06 2V
Power	kW/hp	103/140	155/210	155/210	155/210	155/210	155/210
Capacity	m³	11	14	14	17	17	20

WEIGHT

Unladen weight	kg	11900	12900	12800	13000	13500	14000
Maximum capacity	kg	3850	4900	4900	5950	5950	7000

TYRES

Standard		385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5
----------	--	--------------	--------------	--------------	--------------	--------------	--------------

CONFIGURATION		ECOMIX	ECOMODE
Number of knives		from 10 to 14	from 10 to 14
Adjustable seat with air suspension		●	●
Joystick		multi-function electro-proportional	multi-function electro-proportional
Cabin		PF Cab	PF Cab
Ventilation system		three speeds and temperature setting	three speeds and temperature setting
6 Work led lights		●	●
Fuel tank	l	230	230
Electronic weighing system with four sensors between mixing tub and frame		●	●
Maximum speed	km/h	30	40
Front axle		drive, steering and with suspension	drive, steering and with suspension
Rear axle		fixed (steering option)	drive, steering and with suspension
Abs system		-	automatic
Asr system		-	selectable
Number of augers		1	1
Speed range of the auger	rpm	5, 10, 15, 20, 25, 30, 40, 50	5, 10, 15, 20, 25, 30, 40, 50
External diameter of milling cutter roller	mm	600	700
Hydraulic counter-knives		2	2
Shredder on milling cutter		○	○
Certifiable and or automatic greasing system		○	○