



LEADER PF1 COMPACT

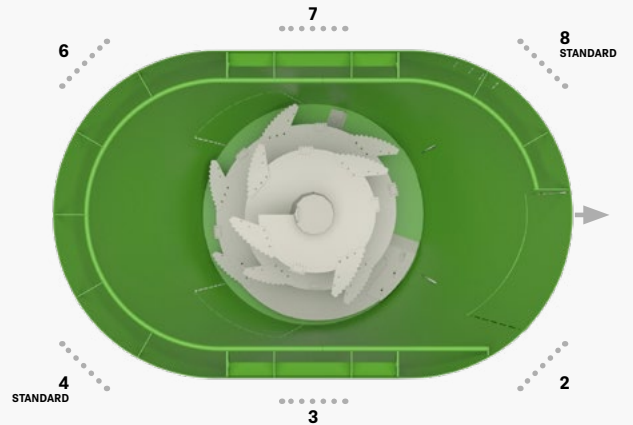

It brings to the attention of all potential customers, all recipients, and to the maximum extent possible, external interlocutors, that Faresin Industries S.p.A. adopts a general Disclaimer regarding the description of the technical and functional characteristics of its machineries, as well as the manner of their use, also with regard to their safety. The Disclaimer must be understood as having a general scope, and therefore Faresin Industries s.p.a. invites to know it, also by accessing the website: www.faresindustries.com



FARESIN.COM



LEADER PF1 COMPACT ECOMIX

TECHNICAL FEATURES

ENGINE TIER 4F		1.12C	1.14C	1.16C
Builder		FPT N45	FPT N45	FPT N45
Power	kW/hp	125/170	125/170	125/170
Aftertreatment system		DOC + SCR	DOC + SCR	DOC + SCR
Capacity	ft ³	423.8	494.4	565

DIMENSIONS ECOMIX		1.12C	1.14C	1.16C
[A] total length	ft	26.2	26	24.4
[B] height	ft	8.2	9.1	9.8
[C] width	ft	8.3	8.3	8.3
[D] milling cutter width	ft	6.6	6.6	6.6
[E] milling height	ft	16.2	16	18.1
[F] unloading height	ft	1.2	1.2	1.2
[G] outside wheels	ft	7.1	7.1	7.3
[H] axle clearance	ft	12.6	12.6	12.6
[I] rear projection	ft	3.2	3.2	3.2
[L] front projection	ft	10.3	10.1	8.4
[M] frame height	ft	1	1	1.1

WEIGHT		1.12C	1.14C	1.16C
Unladen weight	lbs	23,148	24,912	27,116
Maximum capacity	lbs	9,259	10,802	12,345

TYRES		1.12C	1.14C	1.16C
Standard		315/60 R22.5	315/60 R22.5	315/60 R22.5

CONFIGURATION	ECOMIX
Number of knives	from 10 to 14
Adjustable seat with air suspension	●
Joystick	multi-function electro-proportional
Cabin	PF Cab
Ventilation system	three speeds and temperature setting
6 Work led lights	●
Fuel tank	gal 60.7
Electronic weighing system with four sensors between mixing tub and frame	●
Maximum speed	mph 18.6
Front axle	drive, steering and with suspension
Rear axle	fixed (steering option)
Abs system	-
Asr system	-
Number of augers	1
Speed range of the auger	rpm 5, 10, 15, 20, 25, 30, 40, 50
External diameter of milling cutter roller	in 23.6
Hydraulic counter-knives	2
Shredder on milling cutter	○
Certifiable and or automatic greasing system	○

● Standard ○ Optional - Not available