



LEADER PF1 COMPACT

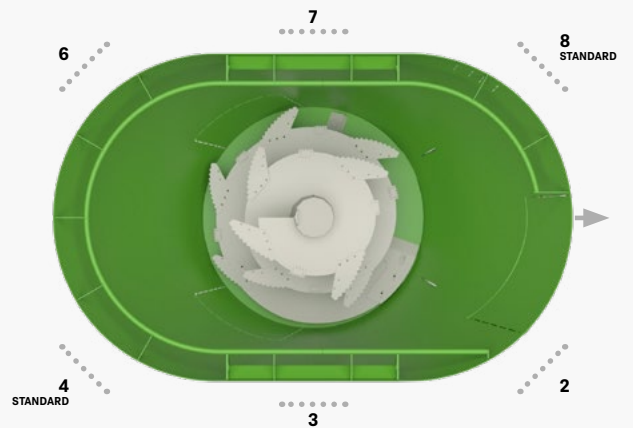

It brings to the attention of all potential customers, all recipients, and to the maximum extent possible, external interlocutors, that Faresin Industries S.p.A. adopts a general Disclaimer regarding the description of the technical and functional characteristics of its machineries, as well as the manner of their use, also with regard to their safety. The Disclaimer must be understood as having a general scope, and therefore Faresin Industries s.p.a. invites to know it, also by accessing the website: www.faresindustries.com



FARESIN.COM



ENGINE STAGE IIIA		1.12C	1.14C	1.16C
Builder		Deutz TCD 2012 L04 2V	Deutz TCD 2012 L04 2V	Deutz TCD 2012 L04 2V
Power	kW/hp	103/140	103/140	103/140
Capacity	m ³	12	14	16

DIMENSIONS ECOMIX		1.12C	1.14C	1.16C
[A] total length	mm	8010	7940	7440
[B] height	mm	2525	2780	3010
[C] width	mm	2550	2550	2550
[D] milling cutter width	mm	2040	2040	2040
[E] milling height	mm	4945	4890	5540
[F] unloading height	mm	375	375	395
[G] outside wheels	mm	2165	2165	2235
[H] axle clearance	mm	3860	3860	3860
[I] rear projection	mm	1000	1000	1000
[L] front projection	mm	3150	3080	2580
[M] frame height	mm	325	325	345

WEIGHT		1.12C	1.14C	1.16C
Unladen weight	kg	10500	11300	12300
Maximum capacity	kg	4200	4900	5600

TYRES		1.12C	1.14C	1.16C
Standard		315/60 R22.5	315/60 R22.5	315/60 R22.5

CONFIGURATION		ECOMIX	
Number of knives		from 10 to 14	
Adjustable seat with air suspension		●	
Joystick		multi-function electro-proportional	
Cabin		PF Cab	
Ventilation system		three speeds and temperature setting	
6 Work led lights		●	
Fuel tank	l	230	
Electronic weighing system with four sensors between mixing tub and frame		●	
Maximum speed	km/h	30	
Front axle		drive, steering and with suspension	
Rear axle		fixed (steering option)	
Abs system		-	
Asr system		-	
Number of augers		1	
Speed range of the auger	rpm	5, 10, 15, 20, 25, 30, 40, 50	
External diameter of milling cutter roller	mm	600	
Hydraulic counter-knives		2	
Shredder on milling cutter		○	
Certifiable and or automatic greasing system		○	

● Standard ○ Optional - Not available