



TECHNICAL SHEET  
**MASTER**

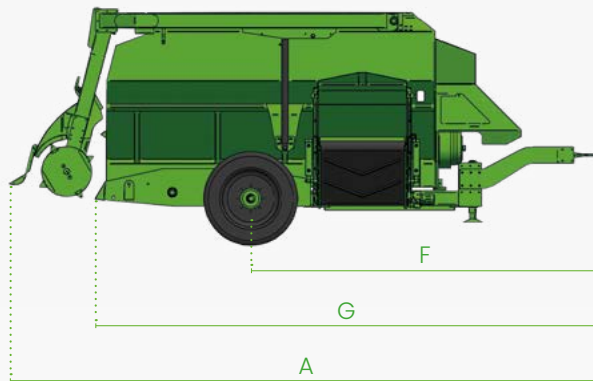


It brings to the attention of all potential customers, all recipients, and to the maximum extent possible, external interlocutors, that Faresin Industries S.p.A. adopts a general Disclaimer regarding the description of the technical and functional characteristics of its machineries, as well as the manner of their use, also with regard to their safety. The Disclaimer must be understood as having a general scope, and therefore Faresin Industries s.p.a. invites to know it, also by accessing the website: [www.faresindustries.com](http://www.faresindustries.com)

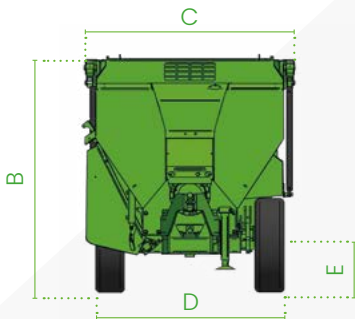

**FARESIN.COM**



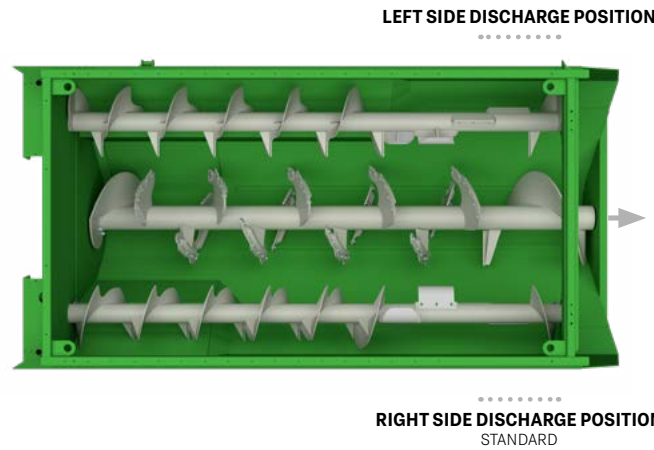

MODELS		3.10	3.12	3.14
<b>PERFORMANCE</b>				
Required power	kW/hp	51 - 70	59 - 80	66 - 90
Capacity	ft³	370.8	423.8	494.4
Power take-off	rpm	540	540	540
<b>DIMENSIONS</b>				
[A] total length	ft	22.8	22.8	25
[B] height	ft	8.3	9	9
[C] width	ft	7.6	7.6	7.6
[D] outside wheels	ft	6.6	6.6	7.5
[E] unloading height	ft	1.8	1.8	2.1
[F] drawbar axle length	ft	12.8	12.8	14.9
[G] total length without cutter	ft	20.8	20.8	23
<b>WEIGHT</b>				
Unladen weight	lbs	14,660	15,212	17,416
Maximum capacity	lbs	8,102	9,259	10,803
<b>CONFIGURATION</b>				
Bilateral discharge position		○	○	○
Chains discharge conveyor	ft	2.9x2.8	2.9x2.8	2.9x2.8
Rubber discharge conveyor		○	○	○
Counter-rotating upper augers		○	○	○
Upper augers thickness	ft	0.03	0.03	0.03
Tank bottom	ft	0.03	0.03	0.03
Inox tank bottom 8 mm		○	○	○
Electric controls		●	●	●
Electronic controls		○	○	○
Mixing reducer's ratio		1:38	1:38	1:38
Axle prepared for braking system		●	●	●
Negativ hydraulic/pneumatic brakes		○	○	○
Gear box		AC70	AC70	AC70

● Standard    ○ Optional    - Not available