

9.60 HEAVY DUTY

TECHNICAL SHEET



9.60 HEAVY DUTY

TECHNICAL FEATURES



Models		9.60
Dimensions		
[A] Height		8 ft 4 in
[B] Width		7 ft 8 in
[C] Track		6 ft 0.4 in
[D] Ground clearance		16 in
[E] Front overhang		4 ft 6 in
[F] Pitch		9 ft 8 in
[G] Rear overhang		50 in
[H] Length without tow hook		18 ft 3 in
[I] Length with tow hook		18 ft 6 in
[L] Cab width		38 in
Width with stabilizers		-
Loading system		
Lifting capacity	lbs	13,227
Lifting height		28 ft 10 in
Max horizontal boom extension		15 ft 7 in
Boom extension at max height		8 in
Number of extracting sections	n.	1
Swinging Angle	°	149
Tank capacity		
Fuel tank	gal	31.7
Adblue tank	gal	2.6
Hydraulic oil tank	gal	39.6
Connection equipment		
Fh		-
FH Heavy		●
Euro		-
Other		
Telematics farmatics		○
Frame lateral levelling 10°		●
Front stabilizers		-
Rear axle swing block		-
Bucket mode		●

Models		9.60
Maximum unladen weight		
Classic 74	lbs	22,928
Classic 75	lbs	-
HLS 74	lbs	23,669
HLS 103	lbs	-
VPSe 100	lbs	23,670

Models		9.60
Drawbar pull		
Classic 74	daN	8.500
Classic 75	daN	-
HLS 74	daN	9.000
HLS 103	daN	-
VPSe 100	daN	10.400

Models		9.60
Tyres		
Turning radius		14 ft 9 in
445/65-R22 OFFSET+40		●
18-22.5 MPT06 OFFSET +40		○
375/85-24 CAMSO 783S OFFSET +10		○
445/65 R22.5 AEOLUS AE77		○

● Standard ○ Optional - Not available

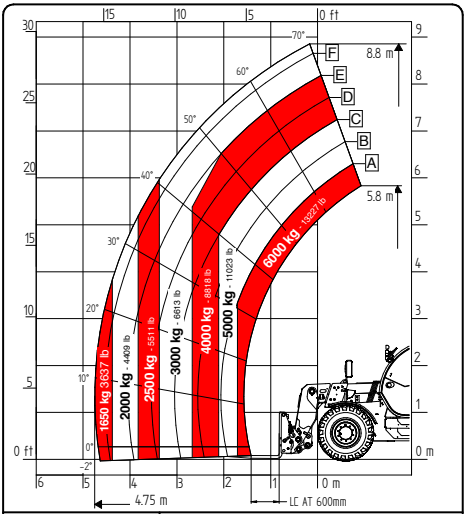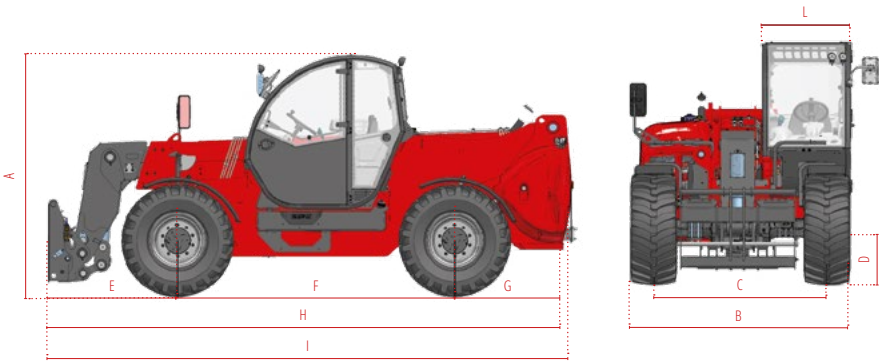

9.60

9.60 HEAVY DUTY

CONFIGURATIONS

Configurations		Classic 74	HLS 74	VPSe 100
Engine				
Deutz 74/101	STAGE V kW/hp	●	●	-
Deutz 100/136	STAGE V kW/hp	-	-	●
Engine water preheating		○	○	○
Post-treatment system		DOC/DPF + SCR	DOC/DPF + SCR	DOC/DPF + SCR
Radiator fan		Mechanical	Mechanical	Mechanical
Hydraulics				
Pump type		Gears	LS piston	LS piston
Hydraulic flow-rate	gal/psi	31.7/3,335	40.1/3,625	47.5/3,625
Flow sharing distributor		-	●	●
Eletro-proportional joystick		Mechanical	Hydraulic	Hydraulic
Quick release		○	○	●
Boom suspension		○	○	○
Floating boom		○	○	○
Lifting valve		-	Ecofast	Ecofast
Regenerating valve up hill		-	●	●
Manual 6-way diverter valve		○	○	○
Constant front flow		○	○	○
Creeper		○	●	●
Boom Electric Socket (PEB)		○	○	○
Electronic boom speed control		-	○	○
Transmission				
Hydrostatic two mechanical gears 24.9 mph		●	●	-
Hydrostatic continuous variation 24.9 mph		-	-	●
Axles				
45% limited slip self-locking differential front axles		●	●	●
Open type differential rear axles		●	●	●
Brakes				
Service brake			Multi-disc in oil bath	
Parking brake			Multi-disc in oil bath with negative drive type SAHR	
Pneumatic / hydraulic trailer brake		○	○	○
Lights				
Front lights		●	●	●
Rear lights		●	●	●
Front and rear work lights		○	○	○
Boom work lights		○	○	○
Rear trailer lights socket		○	●	●
Cabin				
Cabin		Standard	Standard	Standard
Protection grille for windscreen		○	○	○
Colour display	"	3,5	3,5	3,5
Start and stop system (IAS)		○	○	○
Air conditioning		○	○	●
Other				
Tow hook		○	●	●

● Standard ○ Optional - Not available

TELEHANDLERS **NEXT GENERATION**

**FARESIN INDUSTRIES SPA
HEADQUARTERS**

Via dell'Artigianato, 36
36042 Breganze (Vicenza), Italy
Tel. + 39 0445 800300
faresin@faresin.com

FARESIN DEUTSCHLAND GMBH

Steinach B.R. - an der
Frankenhoehe 1
91605 Gallmersgarten, Germany
Tel. +49 9843 9802828
lager@faresin.de

**FARESIN DEUTSCHLAND
NORD GMBH**

Wissmannstr, 59
27755 Delmenhorst, Germany
Tel. +49 4221 800 989-0
info@faresin-nord.de

FARESIN POLAND SP. Z O.O.

ul. Borowiacka 9
87-100 Torun, Polska
Tel. +48 503 147 811
poland@faresin.com

**FARESIN INDUSTRIES
FRANCE**

2 Rue de l'Avenir 14460
Colombelles, France
Tel + 33 2 31 82 79 61
france@faresin.com

It brings to the attention of all potential customers, all recipients, and to the maximum extent possible, external interlocutors, that Faresin Industries S.p.A. adopts a general Disclaimer regarding the description of the technical and functional characteristics of its machineries, as well as the manner of their use, also with regard to their safety. The Disclaimer must be understood as having a general scope, and therefore Faresin Industries s.p.a. invites to know it, also by accessing the website: faresin.com

FARESIN.COM



04.2025