

# 10.65 HEAVY DUTY

TECHNICAL SHEET



# 10.65 HEAVY DUTY

## TECHNICAL FEATURES



Models	10.65	
<b>Dimensions</b>		
[A] Height	mm	2.550
[B] Width	mm	2.334
[C] Track	mm	1.840
[D] Ground clearance	mm	410
[E] Front overhang	mm	1.673
[F] Pitch	mm	2.950
[G] Rear overhang	mm	1.265
[H] Length without tow hook	mm	5.856
[I] Length with tow hook	mm	5.928
[L] Cab width	mm	960
Width with stabilizers	mm	-
<b>Loading system</b>		
Lifting capacity	kg	6.500
Lifting height	m	9,5
Max horizontal boom extension	m	5,4
Boom extension at max height	m	0,45
Number of extracting sections	n.	1
Swinging Angle	°	149
<b>Tank capacity</b>		
Fuel tank	l	120
Adblue tank	l	10
Hydraulic oil tank	l	150
<b>Connection equipment</b>		
Fh		-
FH Heavy		●
Euro		-
<b>Other</b>		
Telematics farmatics		○
Frame lateral levelling 10°		●
Front stabilizers		-
Rear axle swing block		-
Bucket mode		●

Models	10.65	
<b>Maximum unladen weight</b>		
Classic 74	kg	11.050
Classic 75	kg	11.050
HLS 74	kg	11.200
HLS 103	kg	11.200
VPSe 100	kg	11.250

Models	10.65	
<b>Drawbar pull</b>		
Classic 74	daN	8.500
Classic 75	daN	8.500
HLS 74	daN	9.000
HLS 103	daN	9.000
VPSe 100	daN	10.400

Models	10.65	
<b>Tyres</b>		
Turning radius	m	4,5
445/65-R22 OFFSET+40		●
18-22.5 MPT06 OFFSET +40		○
375/85-24 CAMSO 783S OFFSET +10		○
445/65 R22.5 AEOLUS AE77		○

● Standard    ○ Optional    - Not available

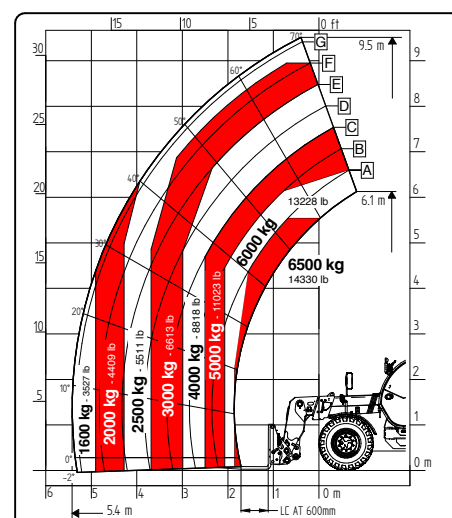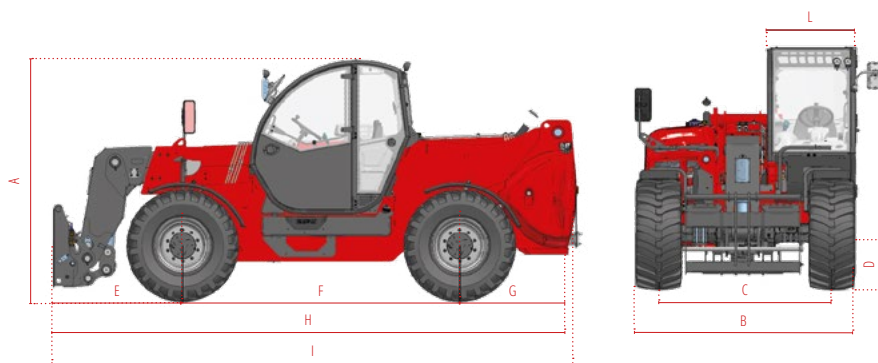

10.65

# 10.65 HEAVY DUTY

## CONFIGURATIONS

Configurations	Classic 74 / Classic 75	HLS 74 / HLS 103	VPSe 100
<b>Engine</b>			
Deutz 74/101	STAGE IIIA STAGE V kW/hp ●	●	-
Deutz 100/136	STAGE V kW/hp -	-	●
Deutz 103/140	STAGE IIIA kW/hp -	●	-
Engine water preheating	○	○	○
Post-treatment system (only Stage V)	DOC/DPF + SCR	DOC/DPF + SCR	DOC/DPF + SCR
Radiator fan	Mechanical	Mechanical	Mechanical
<b>Hydraulics</b>			
Pump type	Gears	LS piston	LS piston
Hydraulic flow-rate	l/bar 120/230	152/250	180/250
Flow sharing distributor	-	●	●
Eletro-proportional joystick	Mechanical	Hydraulic	Hydraulic
Quick release	○	○	●
Boom suspension	○	○	○
Floating boom	○	○	○
Lifting valve	-	Ecofast	Ecofast
Regenerating valve up hill	-	●	●
Manual 6-way diverter valve	○	○	○
Constant front flow	○	○	○
Creeper	○	●	●
Boom Electric Socket (PEB)	○	○	○
Electronic boom speed control	-	○	○
<b>Transmission</b>			
Hydrostatic two mechanical gears 40 km/h	●	●	-
Hydrostatic continuous variation 40 km/h	-	-	●
<b>Axles</b>			
45% limited slip self-locking differential front axles	●	●	●
Open type differential rear axles	●	●	●
<b>Brakes</b>			
Service brake		Multi-disc in oil bath	
Parking brake		Multi-disc in oil bath with negative drive type SAHR	
Pneumatic / hydraulic trailer brake	○	○	○
<b>Lights</b>			
Front lights	●	●	●
Rear lights	●	●	●
Front and rear work lights	○	○	○
Boom work lights	○	○	○
Rear trailer lights socket	○	●	●
<b>Cabin</b>			
Cabin	Standard	Standard	Standard
Protection grille for windscreen	○	○	○
Colour display	" 3,5	3,5	3,5
Start and stop system (IAS)	○	○	○
Air conditioning	○	○	●
<b>Other</b>			
Tow hook	○	●	●

● Standard ○ Optional - Not available

# TELEHANDLERS **NEXT GENERATION**



**FARESIN INDUSTRIES SPA  
HEADQUARTERS**

Via dell'Artigianato, 36  
36042 Breganze (Vicenza), Italy  
Tel. + 39 0445 800300  
faresin@faresin.com

**FARESIN DEUTSCHLAND GMBH**

Steinach B.R. - an der  
Frankenhoehe 1  
91605 Gallmersgarten, Germany  
Tel. +49 9843 9802828  
lager@faresin.de

**FARESIN DEUTSCHLAND  
NORD GMBH**

Wissmannstr, 59  
27755 Delmenhorst, Germany  
Tel. +49 4221 800 989-0  
info@faresin-nord.de

**FARESIN POLAND SP. Z O.O.**

ul. Borowiacka 9  
87-100 Torun, Polska  
Tel. +48 503 147 811  
poland@faresin.com

**FARESIN INDUSTRIES  
FRANCE**

2 Rue de l'Avenir 14460  
Colombelles, France  
Tel + 33 2 31 82 79 61  
france@faresin.com

It brings to the attention of all potential customers, all recipients, and to the maximum extent possible, external interlocutors, that Faresin Industries S.p.A. adopts a general Disclaimer regarding the description of the technical and functional characteristics of its machineries, as well as the manner of their use, also with regard to their safety. The Disclaimer must be understood as having a general scope, and therefore Faresin Industries s.p.a. invites to know it, also by accessing the website: [faresin.com](http://faresin.com)

**FARESIN.COM**



04.2025