


17.45 BIG

TECHNICAL SHEET



17.45 BIG

TECHNICAL FEATURES

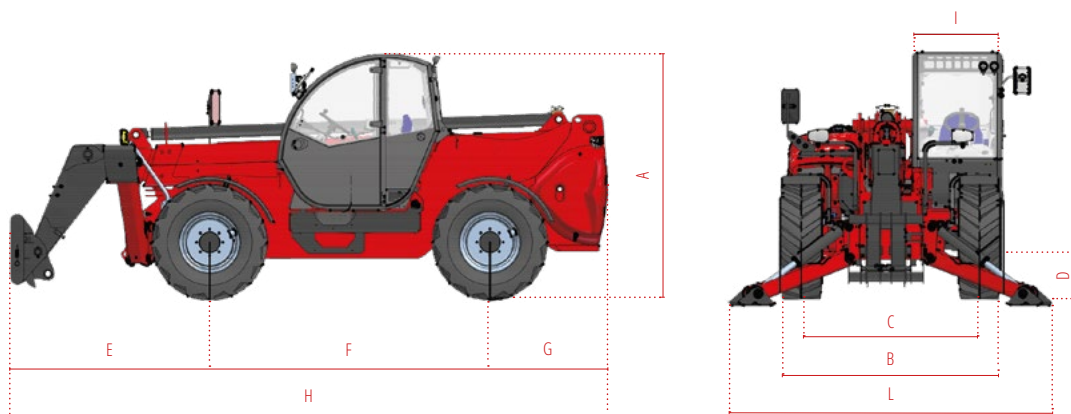


Models	17.45	
Dimensions		
[A] Height	mm	2.560
[B] Width	mm	2.360
[C] Track	mm	1.832
[D] Ground clearance	mm	340
[E] Front overhang	mm	2.330
[F] Pitch	mm	2.950
[G] Rear overhang	mm	1.240
[H] Length without tow hook	mm	6.520
[I] Cab width	mm	960
[L] Width with stabilizers	mm	3.418
Maximum unladen weight		
Classic 55	kg	12.080
Classic 74	kg	12.150
Classic 75	kg	11.980
Drawbar pull		
Classic 55	daN	5.000
Classic 74	daN	5.000
Classic 75	daN	5.000
Loading system		
Lifting capacity	kg	4.500
Lifting height	m	16,4
Max horizontal boom extension	m	12,6
Boom extension at max height	m	2,5
Number of extracting sections	n.	3
Swinging Angle	°	144
Tank capacity		
Fuel tank	l	120
Adblue tank	l	10
Hydraulic oil tank	l	150
Connection equipment		
Fh		●
FH Heavy		-
Euro		-
Other		
Telematics farmatics		○
Frame lateral levelling 10°		●
Front stabilizers		●
Rear axle swing block		○
Bucket mode		●
Tyres		
Turning radius	m	4,2
400/70-20 MPT01 PR14 OFF+35		●
400/70-24 OFFSET +29		○
400/70 - 24" OFFSET +29 NO MARK.		○
445/65 R22.5 OFFSET +50		○

Configurations	Classic 55	Classic 74 / Classic 75
Engine		
Deutz 55,4/75	STAGE V kW/hp ●	-
Deutz 74/101	STAGE IIIA STAGE V kW/hp -	●
Engine water preheating	○	○
Post-treatment system (only Stage V)	DOC/DPF	DOC/DPF + SCR
Radiator fan	Mechanical	Mechanical
Hydraulics		
Pump type	Gears	Gears
Hydraulic flow-rate	l/bar 120/230	120/230
Flow sharing distributor	-	-
Eletro-proportional joystick	Mechanical	Mechanical
Quick release	○	○
Boom suspension	○	○
Floating boom	○	○
Manual 6-way diverter valve	○	○
Constant front flow	○	○
Creeper	○	○
Boom Electric Socket (PEB)	○	○
Transmission		
Hydrostatic single gear 25 km/h	●	-
Hydrostatic single gear 30 km/h	-	●
Axes		
45% limited slip self-locking differential front axles	●	●
Open type differential rear axles	●	●
Brakes		
Service brake	Multi-disc in oil bath	
Parking brake	Multi-disc in oil bath with negative drive type SAHR	
Pneumatic / hydraulic trailer brake	○	○
Lights		
Front lights	●	●
Rear lights	●	●
Front and rear work lights	○	○
Boom work lights	○	○
Rear trailer lights socket	○	○
Cabin		
Cabin	Standard	Standard
Protection grille for windscreen	○	○
Colour display	" 3,5	3,5
Start and stop system (IAS)	○	○
Air conditioning	○	○
Other		
Tow hook	○	○


● Standard ○ Optional - Not available

17.45 BIG


LOAD CHARTS

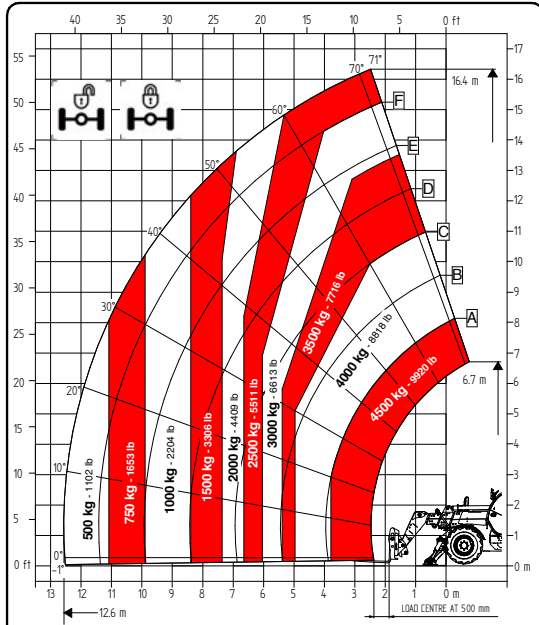

17.45

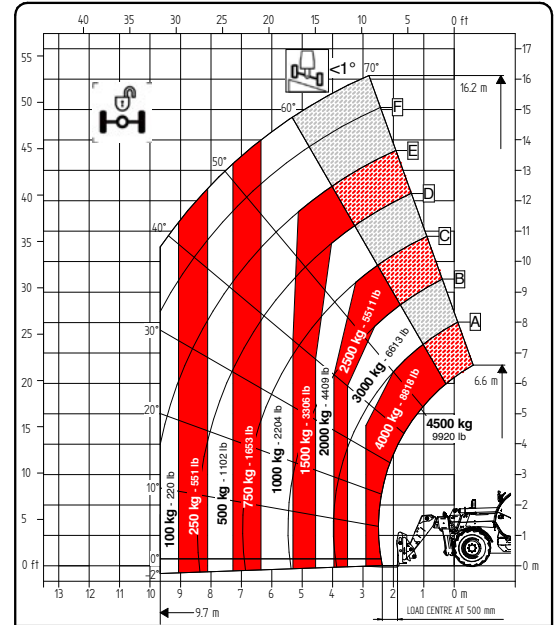

17.45

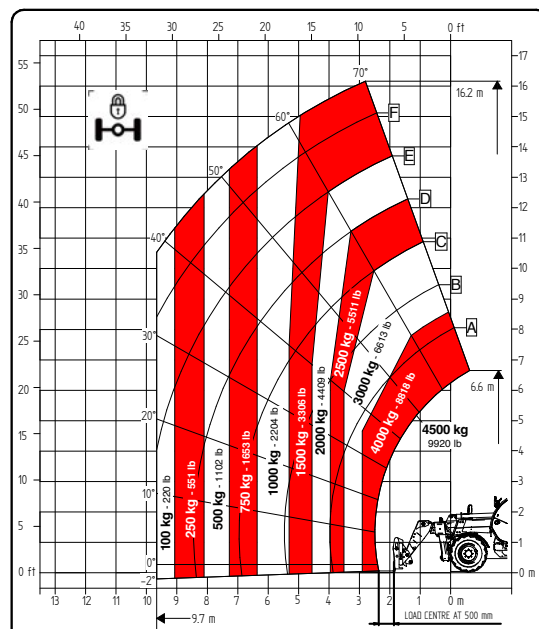

17.45

TELEHANDLERS **NEXT GENERATION**



**FARESIN INDUSTRIES SPA
HEADQUARTERS**

Via dell'Artigianato, 36
36042 Breganze (Vicenza), Italy
Tel. + 39 0445 800300
faresin@faresin.com

FARESIN DEUTSCHLAND GMBH

Steinach B.R. - an der
Frankenhoehe 1
91605 Gallmersgarten, Germany
Tel. +49 9843 9802828
lager@faresin.de

**FARESIN DEUTSCHLAND
NORD GMBH**

Wissmannstr, 59
27755 Delmenhorst, Germany
Tel. +49 4221 800 989-0
info@faresin-nord.de

FARESIN POLAND SP. Z O.O.

ul. Borowiacka 9
87-100 Torun, Polska
Tel. +48 503 147 811
poland@faresin.com

**FARESIN INDUSTRIES
FRANCE**

2 Rue de l'Avenir 14460
Colombelles, France
Tel + 33 2 31 82 79 61
france@faresin.com

It brings to the attention of all potential customers, all recipients, and to the maximum extent possible, external interlocutors, that Faresin Industries S.p.A. adopts a general Disclaimer regarding the description of the technical and functional characteristics of its machineries, as well as the manner of their use, also with regard to their safety. The Disclaimer must be understood as having a general scope, and therefore Faresin Industries s.p.a. invites to know it, also by accessing the website: faresin.com

FARESIN.COM



04.2025