

FS 9.32 COMPACT

TECHNICAL SHEET



FS 9.32 COMPACT

TECHNICAL FEATURES

Models		9.32C
Dimensions		
[A] Height		7 ft 5 in
[B] Width		6 ft 11 in
[C] Track		5 ft 8 in
[D] Ground clearance		13 in
[E] Front overhang		3 ft 6 in
[F] Pitch		9 ft 8 in
[G] Rear overhang		25 in
[H] Length without tow hook		15 ft 4 in
[I] Length with tow hook		15 ft 10 in
[L] Cab width		38 in
Width with stabilizers		-
Height model 1c (low cab)		6 ft 9 in
Loading system		
Lifting capacity	lbs	7,054
Lifting height		29 ft 6 in
Max horizontal boom extension		19 ft 4 in
Boom extension at max height		4 ft 3 in
Number of extracting sections	n.	2
Swinging Angle	°	155
Tank capacity		
Fuel tank	gal	31.7
Adblue tank	gal	2.6
Hydraulic oil tank	gal	23.8
Fuel tank model 1c (low cab)	gal	29.1
Connection equipment		
Fh		●
FH Heavy		-
Euro		○
Other		
Telematics farmatics		○
Frame lateral levelling 10°		-
Front stabilizers		-
Rear axle swing block		-
Bucket mode		●



Models		9.32C
Maximum unladen weight		
Classic 55	lbs	14,881
Classic 75	lbs	14,991
Dynamic 85	lbs	17,350
Performance 85	lbs	17,350
Excellence 85	lbs	17,461

Models		9.32C
Drawbar pull		
Classic 55	daN	4.330
Classic 75	daN	4.330
Dynamic 85	daN	4.330
Performance 85	daN	7.000
Excellence 85	daN	7.000

Models		9.32C
Tyres		
Turning radius		12 ft 5 in
400/70 - 20"		●
400/70 - 24"		○*
460/70-R24" LIFT PRO OFFSET +29		○
460/70-R24" XMCL OFFSET +29		○
18 - 19.5 MPT-06 OFFSET +40		○

● Standard ○ Optional - Not available

* Standard for the Performance and Excellence configurations.

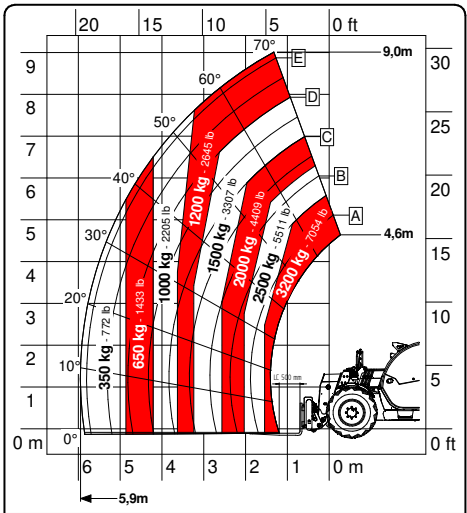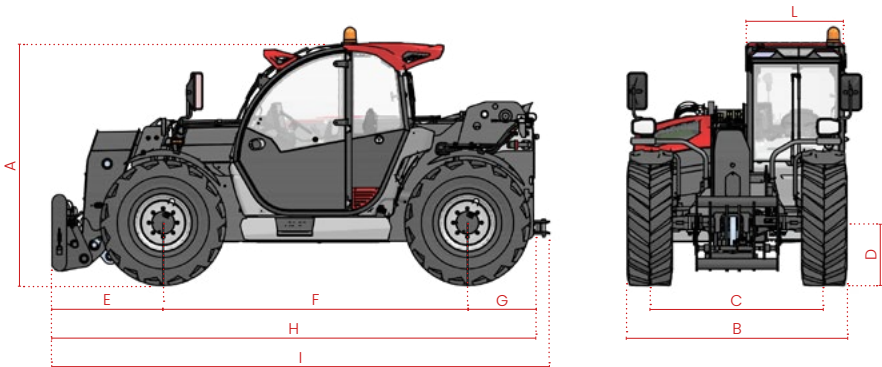

FS 9.32 COMPACT

CONFIGURATIONS

Configurations		Classic 55	Classic 75	Dynamic 85	Performance 85	Excellence 85
Engine						
Deutz 55,4/75	STAGE V kW/hp	●	-	-	-	-
Deutz 75/102	STAGE V kW/hp	-	●	-	-	-
Deutz 85/115	STAGE V kW/hp	-	-	●	●	●
Deutz 100/136	STAGE V kW/hp	-	-	-	-	○
Engine water preheating		○	○	○	○	○
Post-treatment system		DOC/DPF	DOC/DPF + SCR	DOC/DPF + SCR	DOC/DPF + SCR	DOC/DPF + SCR
Radiator fan		proportional	proportional	proportional	proportional + reversible	proportional + reversible
Hydraulics						
Pump type		gears	gears	gears	LS piston	LS piston
Hydraulic flow-rate	gal/psi	26.4/3,625	26.4/3,625	31.7/3,625	39.6/3,625	44.9/3,625
Flow sharing distributor		●	●	●	●	●
Electro-proportional joystick		hydraulic	hydraulic	hydraulic	hydraulic	CAN-BUS
Quick release		○	○	○	○	●
Boom suspension		○	○	○	○	○
Floating boom		○	○	○	○	●
Lifting valve		-	-	-	Ecofast	Ecofast-E
Manual 6-way diverter valve		○	○	○	○	●
Constant front flow		●	●	●	●	●
Creeper		●	●	●	●	●
Boom Electric Socket (PEB)		○	○	○	○	○
Boom function						
Height limiter		-	-	-	-	●
Electronic boom speed control		Full BSC	Full BSC	Full BSC	Full BSC	Full + Single BSC
Autoretract		-	-	-	-	●
Controlled boom retraction		●	●	●	●	●
Bucket shaking		-	-	-	-	●
Transmission						
Hydrostatic single gear 18.6 mph		●	●	●	-	-
Hydrostatic two mechanical gears 24.8 mph		-	-	-	●	●
Axles						
45% limited slip self-locking differential front axles		●	●	●	●	●
Open type differential rear axles		●	●	●	●	●
100% differential lock rear axles		-	-	-	●	●
Brakes						
Service brake		Multi-disc in oil bath				
Parking brake		Multi-disc in oil bath with negative drive type SAHR				
Pneumatic / hydraulic trailer brake		-	-	○	○	○
Lights						
LED front lights		○	○	○	○	●
LED rear lights		●	●	●	●	●
LED front and rear work lights		○	○	○	●	●
LED boom work lights		○	○	○	○	○
Step courtesy light		○	○	○	●	●
Trailer lights rear socket		○	○	●	●	●
Cabin						
Cabin		Standard	Standard	Standard	Standard	Comfort Plus
Protection grille for windscreen		○	○	○	○	○
Touch colour display	"	5	5	5	5	7
Start and stop system		●	●	●	●	●
Internal rear-view mirror		○	○	○	●	●
Air conditioning		○	○	○	○	●
Other						
Tow hook		○	○	●	●	●

● Standard ○ Optional - Not available

TELEHANDLERS **NEXT GENERATION**

**FARESIN INDUSTRIES SPA
HEADQUARTERS**

Via dell'Artigianato, 36
36042 Breganze (Vicenza), Italy
Tel. + 39 0445 800300
faresin@faresin.com

FARESIN DEUTSCHLAND GMBH

Steinach B.R. - an der
Frankenhoehe 1
91605 Gallmersgarten, Germany
Tel. +49 9843 9802828
lager@faresin.de

**FARESIN DEUTSCHLAND
NORD GMBH**

Wissmannstr, 59
27755 Delmenhorst, Germany
Tel. +49 4221 800 989-0
info@faresin-nord.de

FARESIN POLAND SP. Z O.O.

ul. Borowiacka 9
87-100 Torun, Polska
Tel. +48 503 147 811
poland@faresin.com

**FARESIN INDUSTRIES
FRANCE**

2 Rue de l'Avenir 14460
Colombelles, France
Tel + 33 2 31 82 79 61
france@faresin.com

It brings to the attention of all potential customers, all recipients, and to the maximum extent possible, external interlocutors, that Faresin Industries S.p.A. adopts a general Disclaimer regarding the description of the technical and functional characteristics of its machineries, as well as the manner of their use, also with regard to their safety. The Disclaimer must be understood as having a general scope, and therefore Faresin Industries s.p.a. invites to know it, also by accessing the website: faresin.com

FARESIN.COM



01.2025