

LEADER PF 1 CLASSIC

TECHNICAL SHEET





LEADER PF 1 CLASSIC

TECHNICAL FEATURES

Models		1.12CL	1.14CL	1.16CL
Dimensions				
[A] Total length	in	315	313	293
[B] Height	in	99	109	118
[C] Width	in	100	100	100
[D] Milling cutter width	in	80	80	80
[E] Milling height	in	195	195	195
[F] Unloading height	in	15	15	16
[G] Outside wheels	in	85	85	88
[H] Axle clearance	in	152	152	152
[I] Rear projection	in	39	39	39
[L] Front projection	in	124	121	102
[M] Frame height	in	13	13	14
Engine				
Deutz TCD 3,6 L4 105/140	STAGE V	●	●	●
Tank capacity				
Fuel tank	gal	60.7	60.7	60.7
Adblue tank	gal	2.6	2.6	2.6
Hydraulic oil tank	gal	21.1	21.1	21.1
Weights				
Capacity	ft ³	423.8	494.4	565
Unladen weight	lbs	24,691	25,242	26,124
Maximum capacity	lbs	-	-	-
Tyres				
Standard		315/60 R22.5 (Front) 285/70 R19,5 (Rear)	315/60 R22.5 (Front) 285/70 R19,5 (Rear)	315/60 R22.5 (Front) 285/70 R19,5 (Rear)

● Standard ○ Optional - Not available

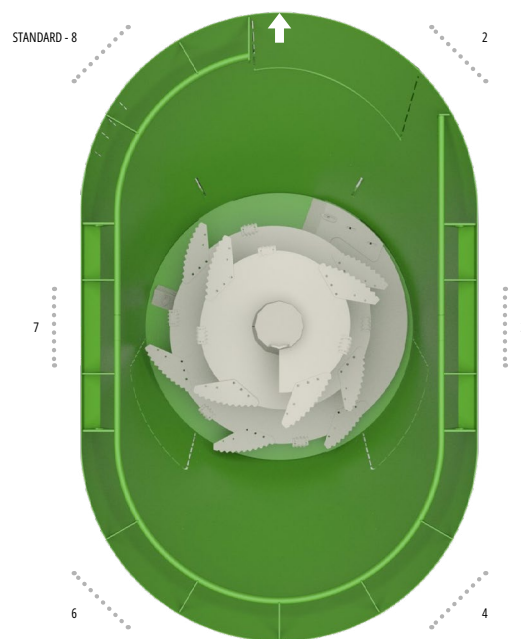

LEADER PF 1 CLASSIC

CONFIGURATIONS

Configurations		Classic
Hydraulics		
Service distributor		Elettro-proportional
Hydraulic service capacity	gal/psi	24.3/2,610
Multi-function electro-proportional joystick		●
Cabin		
Cabin		PF Cab
Seat		Mechanical suspension
Colour display	"	7
Operating armrest		●
Steering column adjustment	n.	3
Three speeds ventilation system and temperature controller		●
Air conditioning		○
Lights		
LED worklights		6
Street lighting		○
Side end-outline marker lights		○
Mixing		
Capacity	ft ³	423.8 - 565
Number of augers	n.	1
Speed range of the auger	rpm	5, 10, 15, 20, 25, 30, 40
Knives with two positions		●
Auger with Easyclean solution		●
Mixing tank wall thickness	in	1/4
Mixing tank floor thickness	in	3/4
Counter-knives	n.	2 manual
Loading Halt		○
Cutter		
External diameter of milling cutter roller	in	23
Manual hopper on milling cutter		○
Milling cutter lifting cylinder	n.	1
Axles		
Traction		2 WD, 4 WS
Suspensions		Front hydropneumatic
Discharges		
Standard position	n.	8
Rubber unloading belt		○
Chassis		
Rear bumper		Not adjustable
Fuel cap		Quick-locking cap with key
Front suspension height indicator		Front
Hydraulic system		
Service distributor		Electroproportional, on-off
Transmission		
Engine water preheating		○
Post-treatment system (only Stage V)		DOC / DPF + SCR
Speed	mph	16.8
Other		
Telematics Farmatics		○
NIR		○
360° Camera system		○

● Standard ○ Optional - Not available

THE NEW STANDARD FOR MIXER WAGONS



**FARESIN INDUSTRIES SPA
HEADQUARTERS**

Via dell'Artigianato, 36
36042 Breganze (Vicenza), Italy
Tel. + 39 0445 800300
faresin@faresin.com

FARESIN DEUTSCHLAND GMBH

Steinach B.R. - an der
Frankenhoehe 1
91605 Gallmersgarten, Germany
Tel. +49 9843 9802828
lager@faresin.de

**FARESIN DEUTSCHLAND
NORD GMBH**

+49 1525 9697091
info@faresin-nord.dee

FARESIN POLAND SP. Z O.O.

ul. Borowiacka 9
87-100 Torun, Polska
Tel. +48 503 147 811
poland@faresin.com

**FARESIN INDUSTRIES
FRANCE**

2 Rue de l'Avenir 14460
Colombelles, France
Tel + 33 2 31 82 79 61
france@faresin.com

It brings to the attention of all potential customers, all recipients, and to the maximum extent possible, external interlocutors, that Faresin Industries S.p.A. adopts a general Disclaimer regarding the description of the technical and functional characteristics of its machineries, as well as the manner of their use, also with regard to their safety. The Disclaimer must be understood as having a general scope, and therefore Faresin Industries s.p.a. invites to know it, also by accessing the website: faresin.com

FARESIN.COM



11.2025